

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 June 2004 (10.06.2004)

PCT

(10) International Publication Number
WO 2004/048802 A1

(51) International Patent Classification⁷: **F16F 9/54,**
B21D 22/00, 24/00

(21) International Application Number:
PCT/SE2003/001646

(22) International Filing Date: 24 October 2003 (24.10.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0203539-2 28 November 2002 (28.11.2002) SE

(71) Applicant (for all designated States except US):
STRÖMSHOLMEN AB [SE/SE]; Box 216, S-573
23 TRANÅS (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JOHANSSON,**
Mårten [SE/SE]; Dackeplan 2B, S-595 32 MJÖLBY
(SE). **LUNDAHL, Leif** [SE/SE]; Björkhamnen, S-360 47

NÖBBELE (SE). **NORDVALL, Per** [SE/SE]; Hagadals-
gatan 57, S-TRANÅS 573 40 (SE). **PAP, Zoltan** [SE/SE];
Brinkgatan 11, S-573 42 TRANÅS (SE). **CRONHOLM,**
Marcus [SE/SE]; Vintergatan 14, S-595 53 MJÖLBY
(SE).


(74) Agent: **STRÖM & GULLIKSSON IP AB**; Wallenbergs
gata 4, S-583 35 LINKÖPING (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: FLANGE DRESSING AND METHOD FOR ATTACHING A GAS SPRING

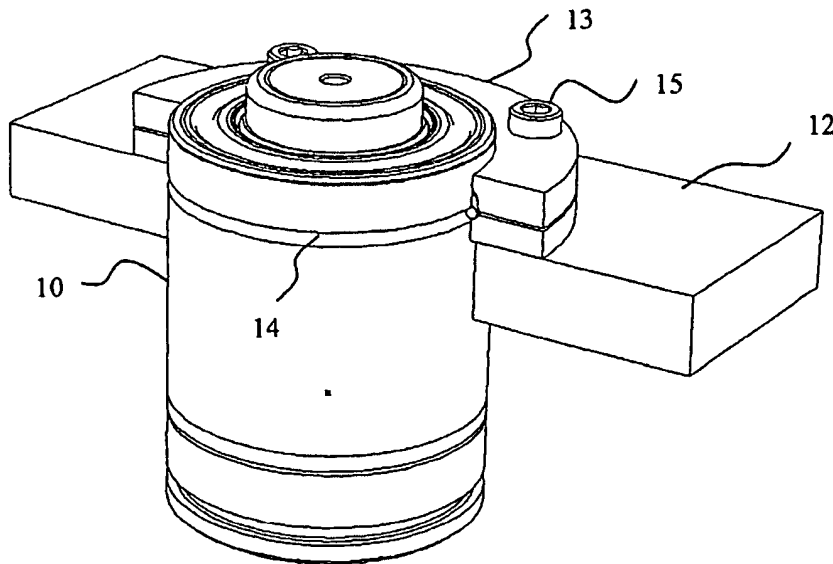

(57). **Abstract:** The present invention relates to a flanged connection (13) and to a method of fixing a gas-filled spring (10) in a machine tool (12), the flanged connection (13) comprising an upper flange half and a lower flange half which can be joined together and each have a through-opening intended to receive the gas-filled spring (10), and a locking ring (18) intended to secure the gas-filled spring (10) by insertion into a groove (14) of complementary design around the gas-filled spring (10) and fixing between the flange halves, the locking ring (18) being supplemented by a fixing element designed to apply a clamping force around the gas-filled spring (10) when joining the flange halves together.

WO 2004/048802 A1